

XL

XL

FULL BODY
PORCELAIN

2 Finishings	2 Finitions	2 Fertigungs	2 Acabamentos
P Polished	Poli	Poliert	Polido
A Soft Shiny	Adouci	Halbpoliert	Amaciado

1 Size . 1 Format . 1 Formate . 1 Formato
60x60



Floor and Wall Tiles
Sols et Murs
Boden und Wand
Pavimento e Revestimento



Modular (joint 2mm)
Modulaire (joint 2mm)
Modular (2mm Fuge)
Modular (junta 2mm)



Always same caliber
Unicalibre
Einziges Kaliber
Calibre único



V0
Shade Variation
Denuançage
Farbspiel
Destonificação




U3 P3 E3 C2

MARGRES
CERAMIC TILES




EDISON BRANCO - 80 / VOLTA PRETO - 93
Polished 60x60

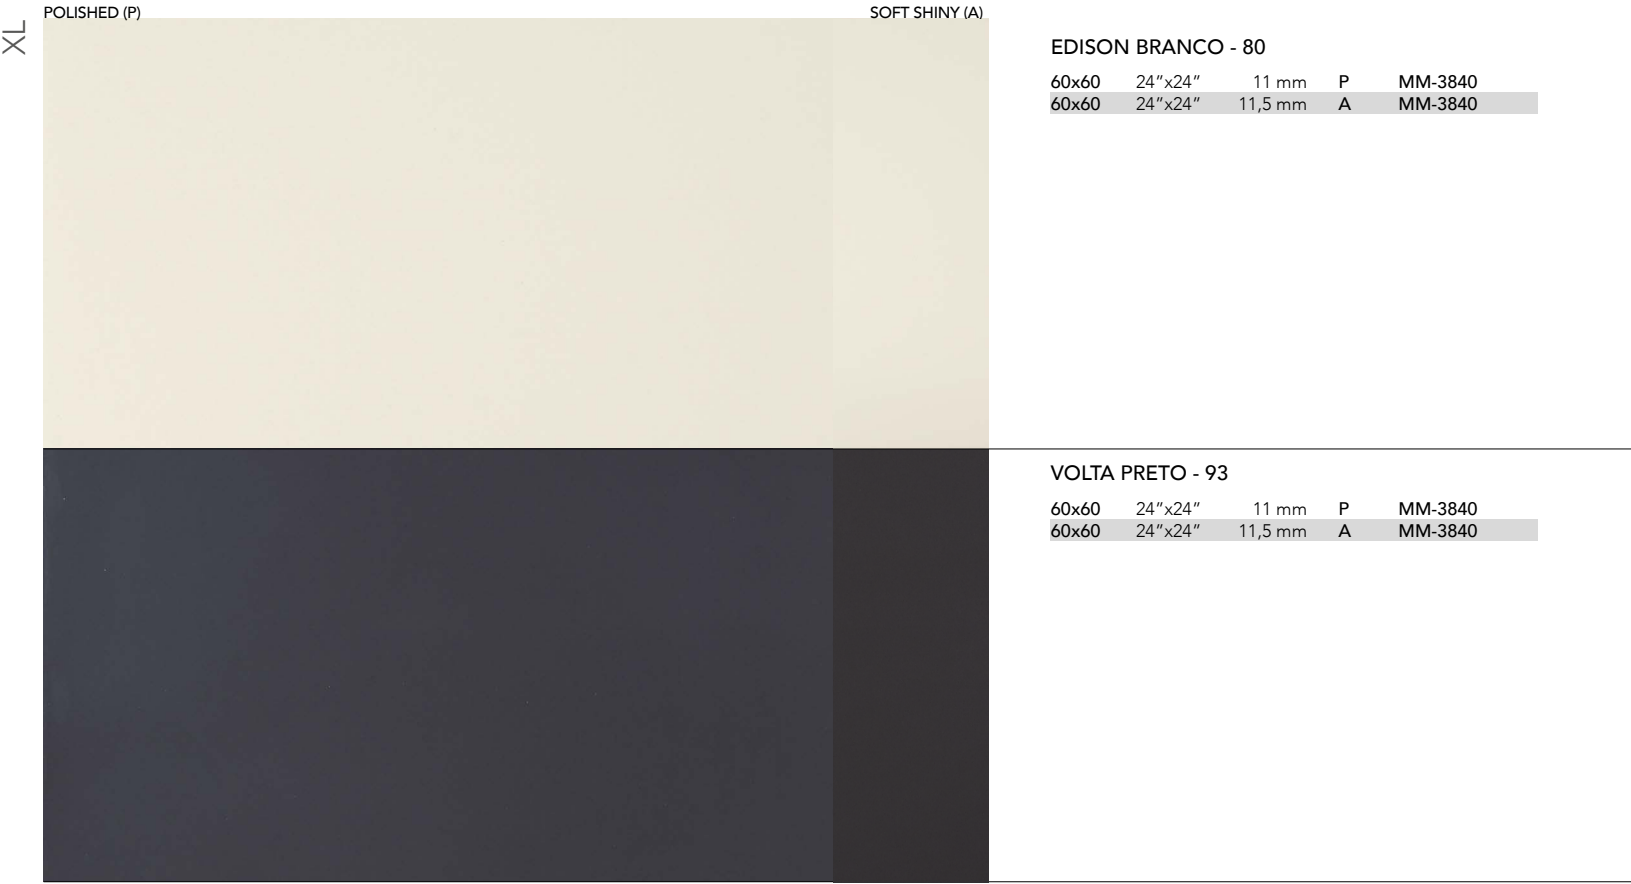


Special Pieces
Pièces Spéciales
Spezialteile
Peças Especiais



Skirting **A / P**
Plinthe **A / P**
Sockel **A / P**
Rodapé Boleado **A / P**
8x60 3,2"x24"
P-6200

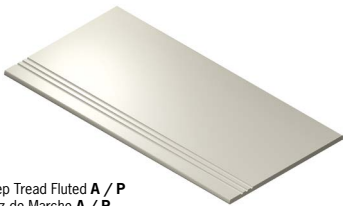

Step Tread Fluted **A / P**
Nez de Marche **A / P**
Durchschneiden Treppenstufe **A / P**
Degrau Sulcado **A / P**
30x60 12"x24"
P-6370

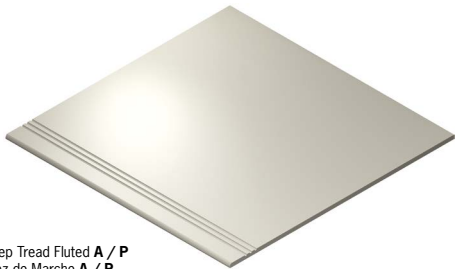

Step Tread Fluted **A / P**
Nez de Marche **A / P**
Durchschneiden Treppenstufe **A / P**
Degrau Sulcado **A / P**
60x60 24"x24"
P-6510

Package
Emballage
Verpackung
Embalagem

size format formato formato	box / boîte / karton / caixa			pallet / palette / palett / palette		
	sqm m2	pieces pièces stück peças	weight poids gewicht peso (kg)	sqm m2	boxes boîtes kartonen caixas	weight poids gewicht peso (kg)
60x60 soft shiny	1,06	3	27,9	31,80	30	867
60x60 polished	1,06	3	25,5	31,80	30	795
step tread fluted 30x60 soft shiny	-	7	31,9	-	-	-
step tread fluted 30x60 soft shiny / polished	-	7	29,3	-	-	-
step tread fluted 60x60 soft shiny / polished	-	3	27,9	-	-	-
step tread fluted 60x60 soft shiny / polished	-	3	25,5	-	-	-
skirting 8x60 soft shiny		11	13,8			
skirting 8x60 polished	-	12	14,4	-	-	-

The featured weights are approximate. The quantities of sqm (m²)/pieces per box/palette may exceptionally vary and shall be confirmed by Margres.
Les poids présentés sont approximatifs. Les quantités m²/pièces par boîte/palette peuvent exceptionnellement varier. Nous vous prions donc de bien vouloir confirmer auprès de Margres.
Die angegebenen Gewichte sind Näherungswerte. Die Mengen, m²/Stücke pro Verpackung/Palette können in Einzelfällen abweichen, weshalb Sie bei Margres bestätigt werden sollten.
Os pesos apresentados são aproximados. As quantidades m²/peças por caixa/palette podem excepcionalmente variar, pelo que agradecemos a confirmação junto da Margres.

Technical Data
Données Techniques
Technischen Eigenschaften
Características Técnicas

Technical Data Données Techniques Technischen Eigenschaften Características Técnicas		Directives Normes Normen Normas	EN 14411 Directives values Valeur norme Richtlinie werten Valores norma	XL	
	Thickness Épaisseur Stärke Espessura	ISO 10545 - 2	±5% (max.) (max.) (max.) (máx.)	±2% Polished P Soft Shiny A	11,0mm 11,5mm
	Bending strength Résistance à la flexion Biegefestigkeit Resistência à flexão	ISO 10545 - 4	35N/mm² (min.) (min.) (min.) (min.)	50N/mm²	
	Linear thermal expansion coeficient Coefficient de dilatation thermique linéaire Linearer thermischer Ausdehnungskoeffizient Coeficiente de dilatação térmica linear	ISO 10545 - 8	Manufacturer's standard Valeurs du fabricant Hersteller Werte Valores do fabricante	6,5°10 ⁻⁶ /°C	(max.) (máx.)
	Chemical resistance Résistance chimique Chemische Beständigkeit Resistência química	Cahier CSTB 3659 Attachment 8 Annexe 8 Anlage 8 Anexo 8	Manufacturer's standard Valeurs du fabricant Hersteller Werte Valores do fabricante	UGL	3 No alteration Aucune modification Unverändert Sem alteração
	Frost resistance Résistance au gel Frostbeständigkeit Resistência ao gelo	ISO 10545 - 12	Required Nécessaire Anforderung Exigida	Yes Oui Ja Sim	
	Water absorption Absortion d'eau Wasseraufnahme Absorção de água	ISO 10545 - 3	±0,5% (max.) (max.) (max.) (máx.)	± 0,03%	
	Deep abrasion resistance Résistance a l'abrasion profonde Widerstand gegen Tiefenverschleiß Resistência à abrasão profunda	ISO 10545 - 6	175mm³ (max.) (max.) (max.) (máx.)	123 mm³	
	Stain resistance Résistance aux taches Beständigkeit gegen Fleckenbildner Resistência a manchas	ISO 10545 - 14	Manufacturer's standard Valeurs du fabricant Hersteller Werte Valores do fabricante	UGL	4 - 5 Simple removal Enlèvement simple Einfache Entfernung Remoção simples
	Thermal shock resistance Résistance au choc thermique Temperaturwechselbeständigkeit Resistência ao choque térmico	ISO 10545 - 9	Manufacturer's standard Valeurs du fabricant Hersteller Werte Valores do fabricante	Yes Oui Ja Sim	
	Shade variation Denuançage Farbspiel Destonificação	ANSI 137.1	V0 None / Nul / Gleich Null / Nulo V1 Minor / Léger / Leich / Ligeiro V2 Low / Faible / Gering / Baixo V3 Medium / Moyen/ Mittelmäßig / Médio V4 Major / Élevé / Stark / Alto	V0	Very uniforme appearance Aspect très uniforme Sehr gleichmäßiges Aussehen Aspecto muito uniforme



série commerciale XL (famille non emailé)			
dimensions (mm)		référence	classement
dim. planes	ep.		
595x595	11	6680 P	U3 P3 E3 C2
595x595	11	6693 P	U3 P3 E3 C2



reference referências	colours cores	
6680P	80	edison branco
6693P	93	volta preto

