



OPEN

Grey


MARGRES
CERAMIC STYLE

OPEN



Grey





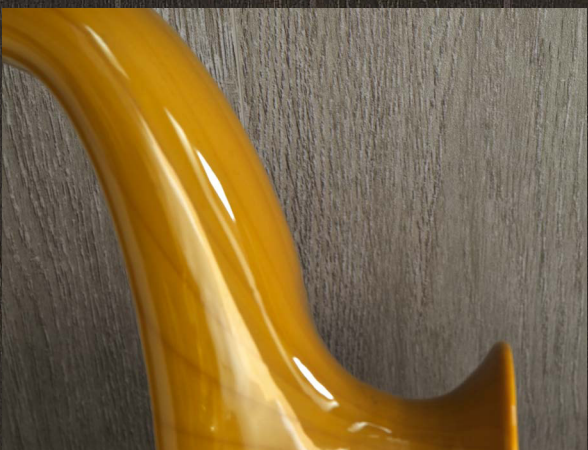

OPEN
Wenge

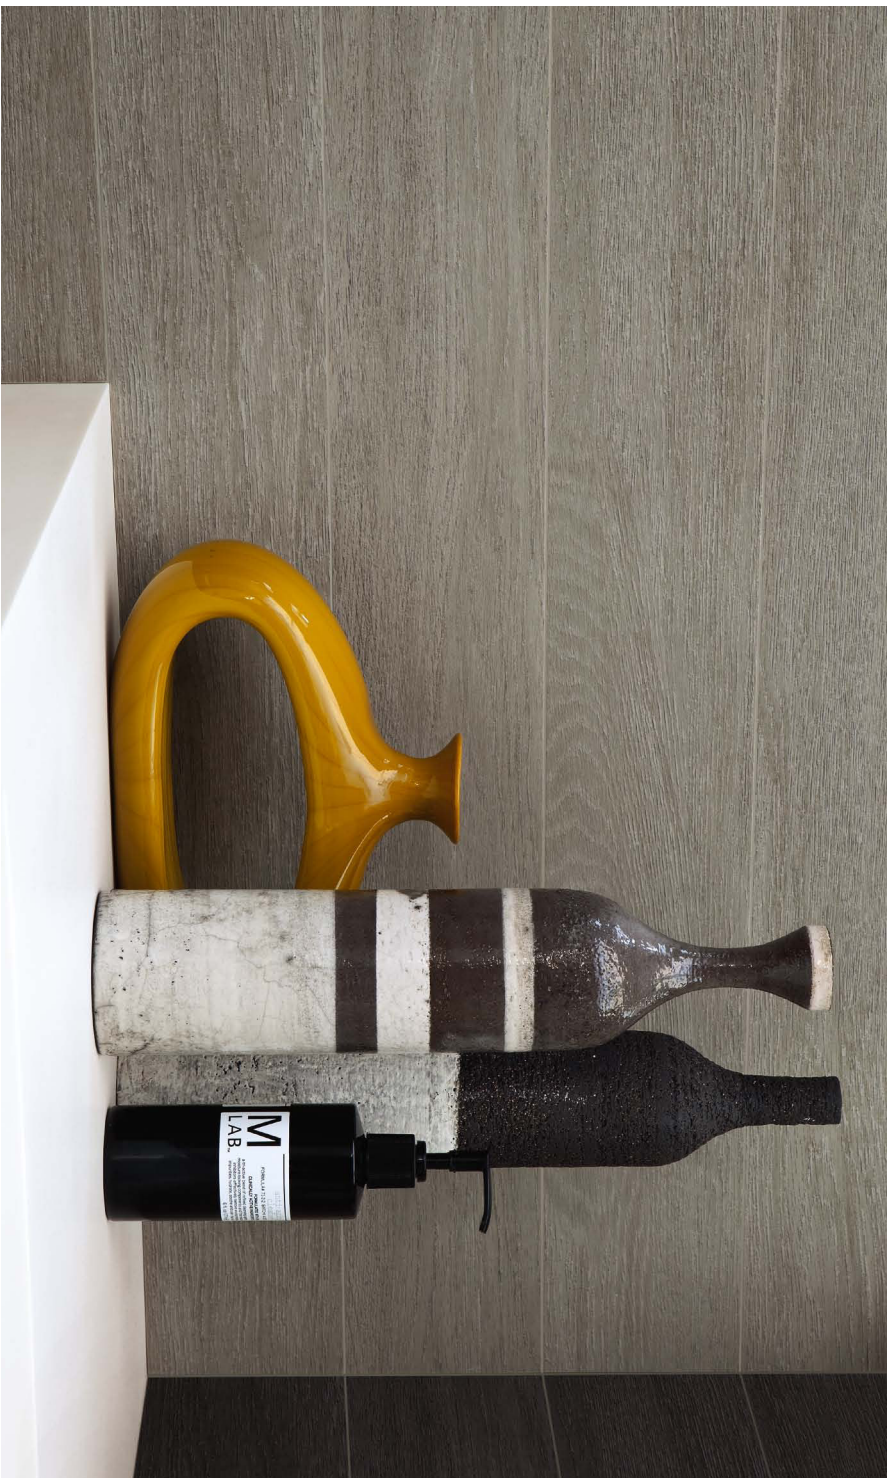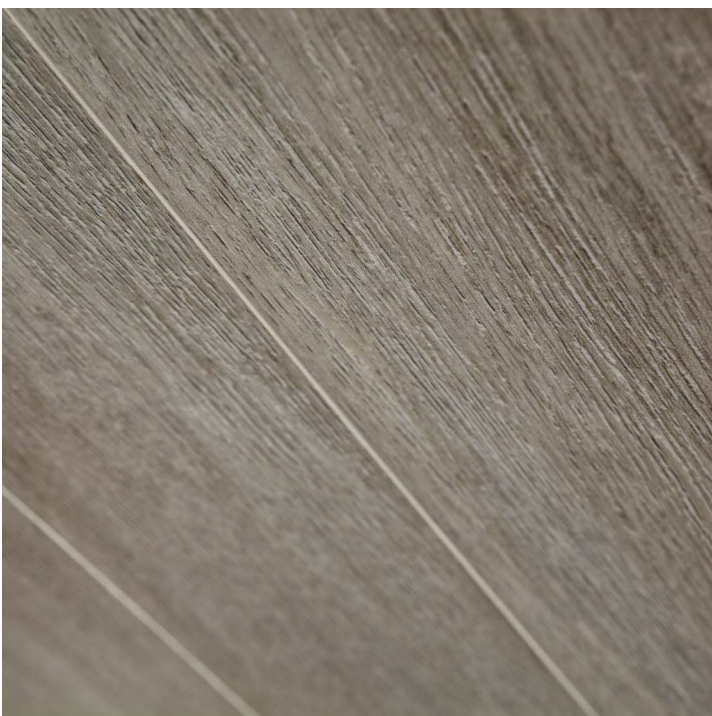

OPEN

Wenge - Grey




OPEN

DECK

MARGRES
CERAMIC STYLE

OPEN
Wenge Deck

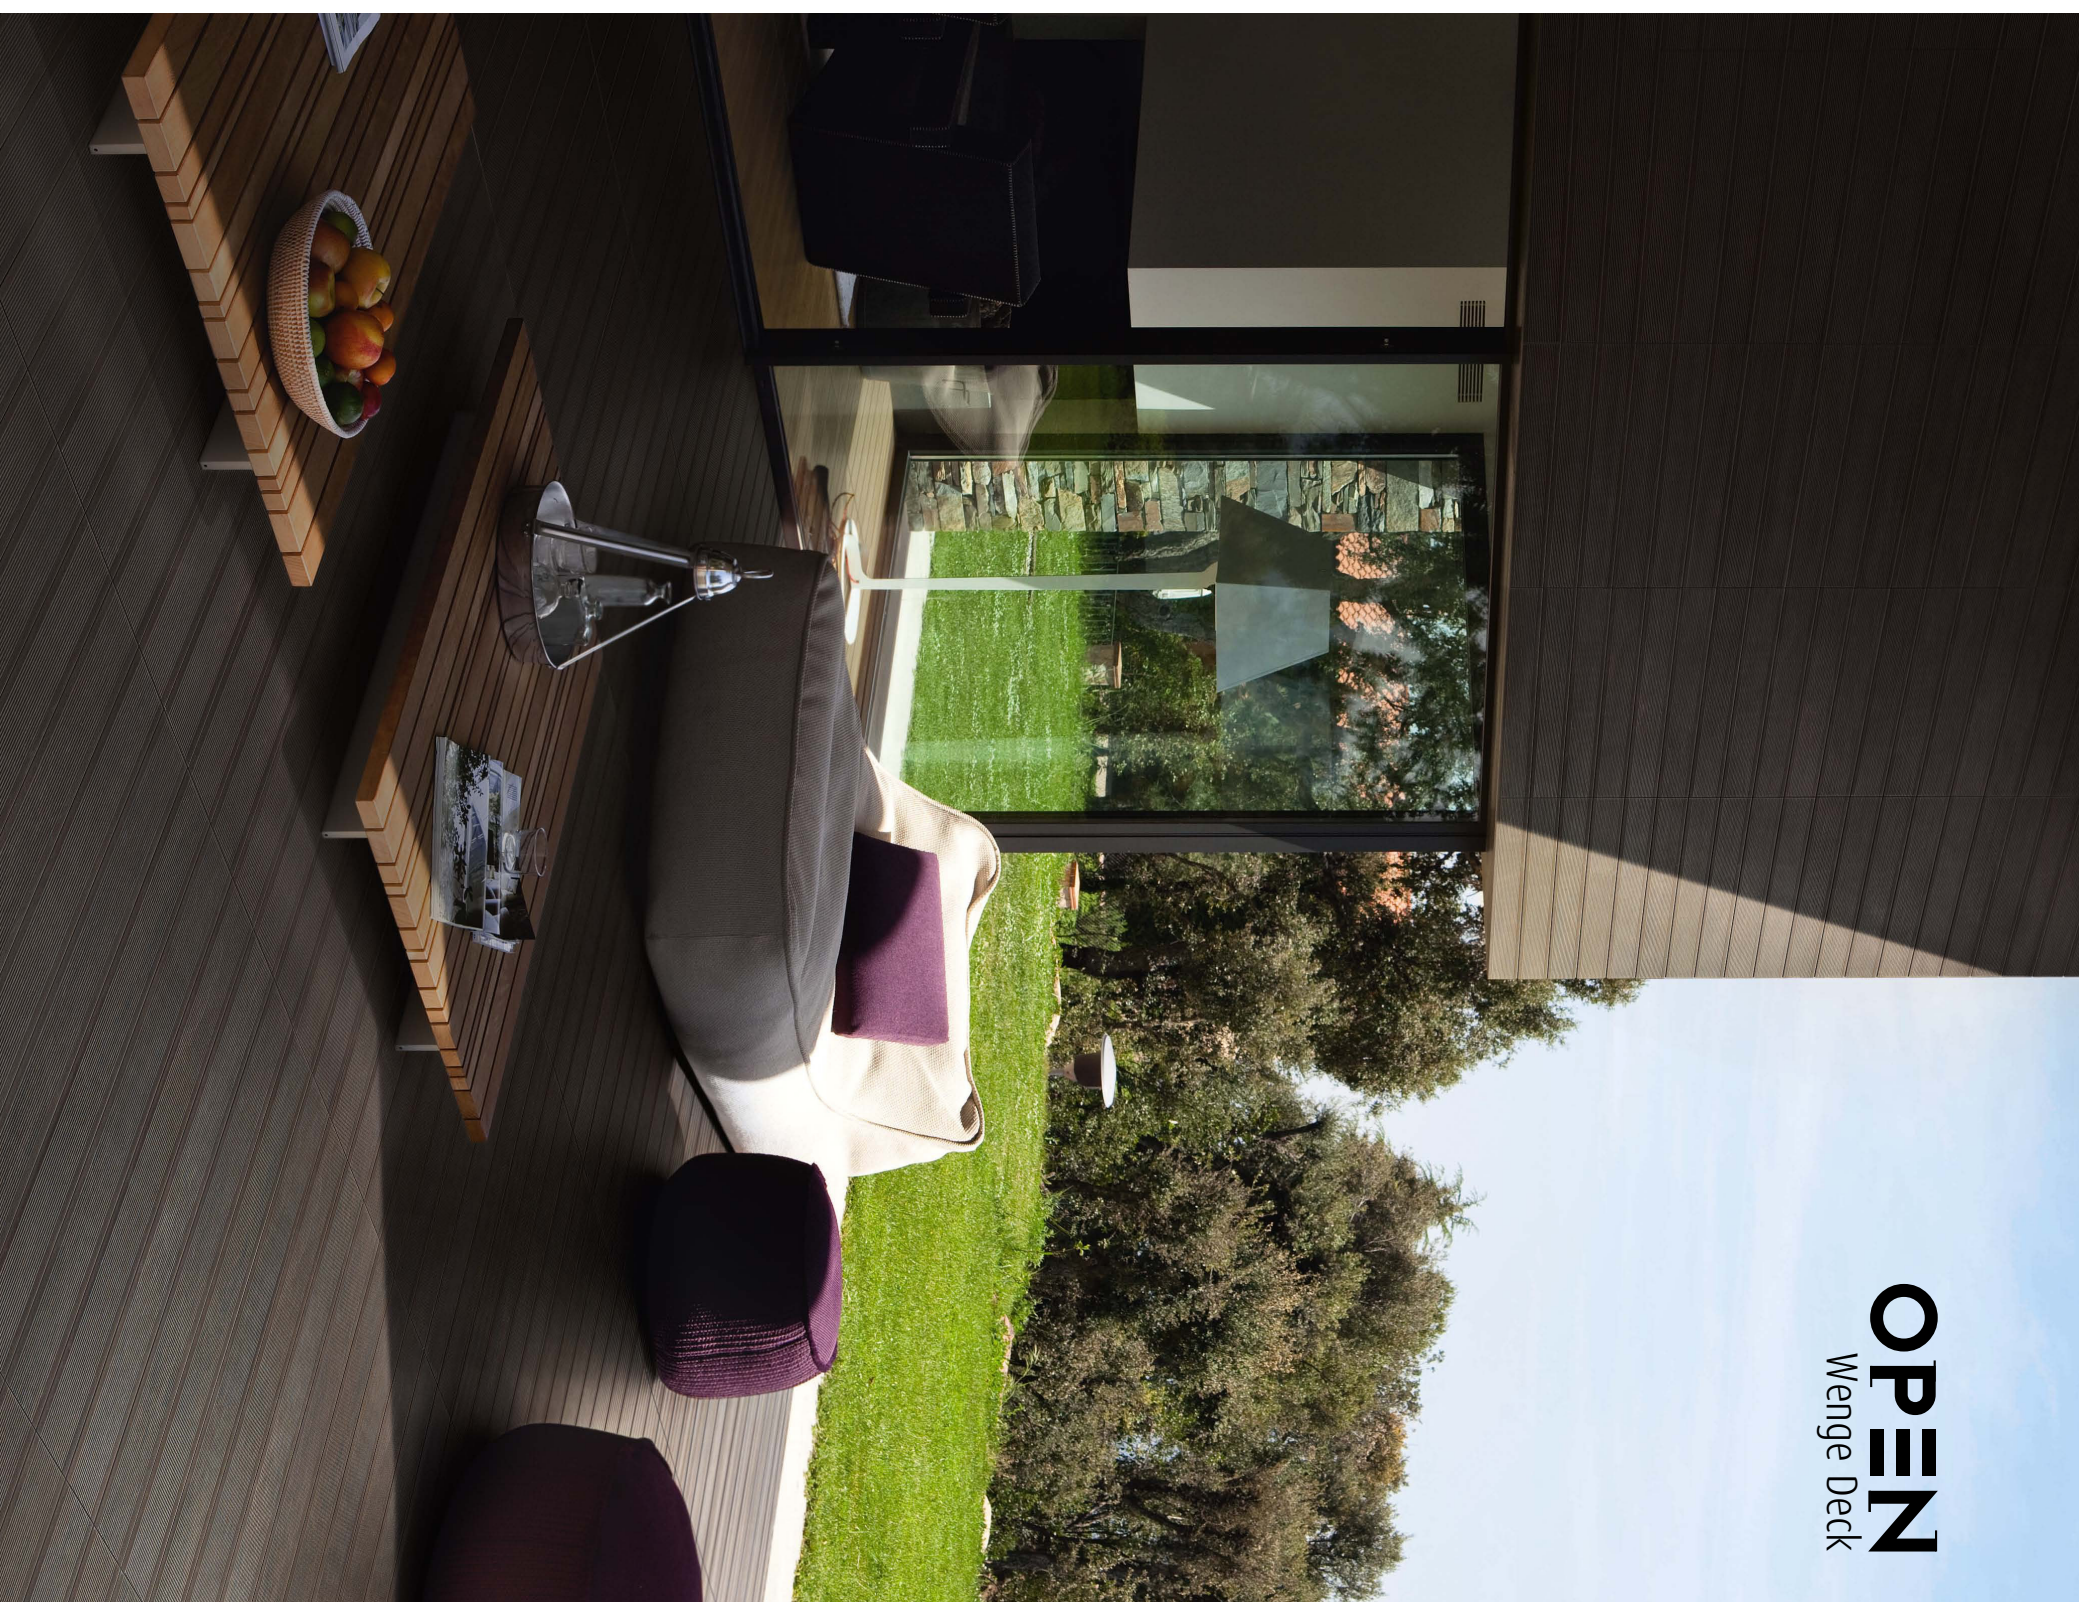

OPEN

Brown Deck



OPEN

Grey Deck





11x90 Natural Rectified

15x90 Natural Rectified

MM-3660

OP1 - open white



OP2 - open beige



OP3 - open grey



OP4 - open brown



OP5 - open wenge



11x90 Natural Rectified

MM-3760



OP3K - open grey deck



OP4K - open brown deck



OP5K - open wenge deck





Open White Shadows
30x30 12"x12"
P-6370



Open Beige Shadows
30x30 12"x12"
P-6370



Open Grey Shadows
30x30 12"x12"
P-6370



Open Brown Shadows
30x30 12"x12"
P-6370



Open Wenge Shadows
30x30 12"x12"
P-6370



Open Light Chess
28x24 11"x9,5"
P-6350



Open Dark Chess
28x24 11"x9,5"
P-6350



Open Lines Grey
30x30 12"x12"
P-6540



Open Globes Grey
31x31 12,2"x12,2"
P-6620



Open Lines White
30x30 12"x12"
P-6540




Open Globes White
31x31 12,2"x12,2"
P-6620

Panel Open Wenge Shadows




Panel Open Light Chess

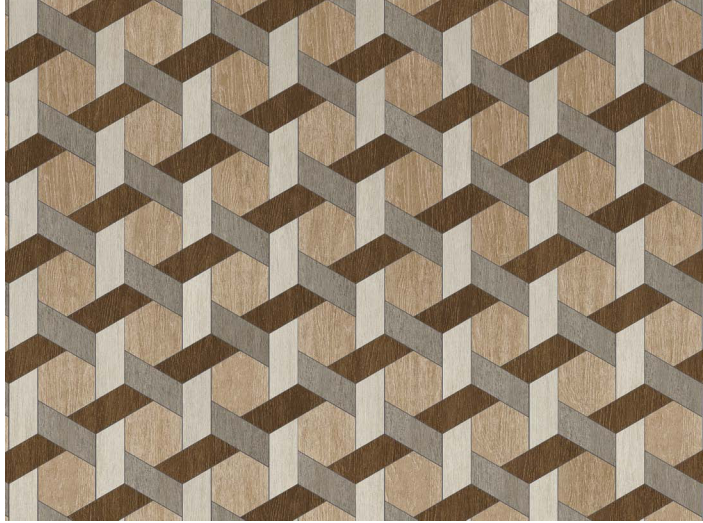


Panel Open Lines White




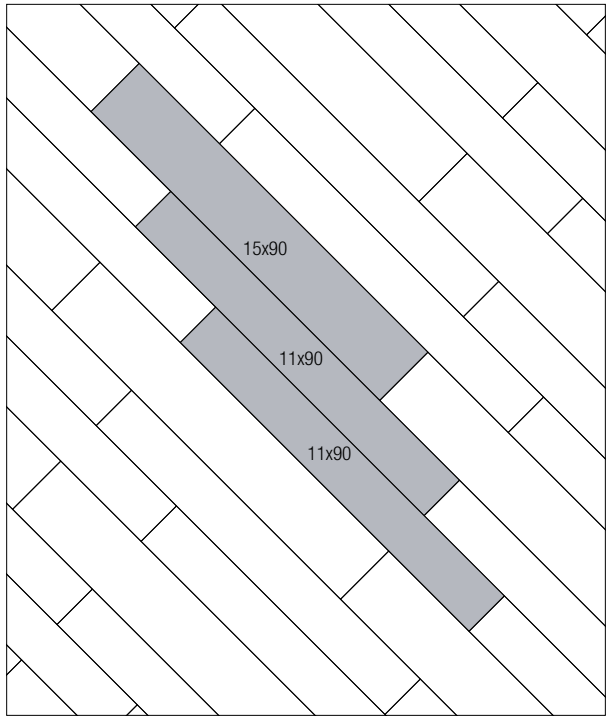


2F-1 - 15x90 - 40,54%
11x90 - 59,46%

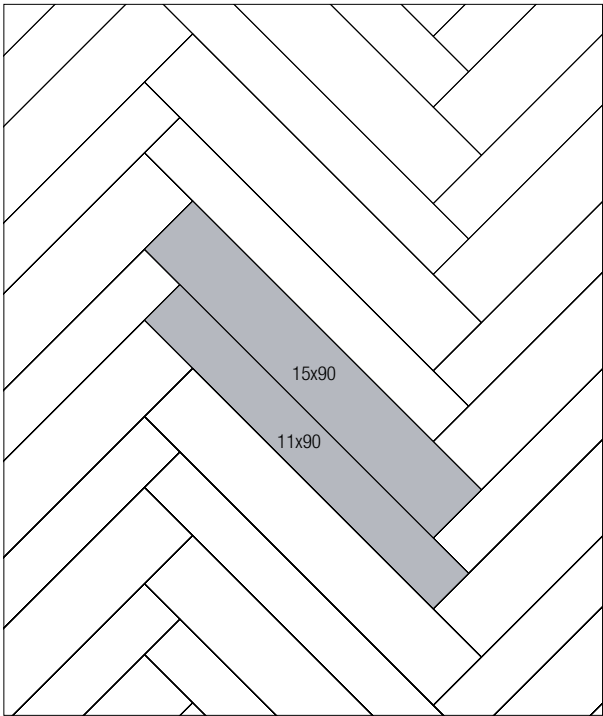


2F-2 - 15x90 - 57,70%
11x90 - 42,30%

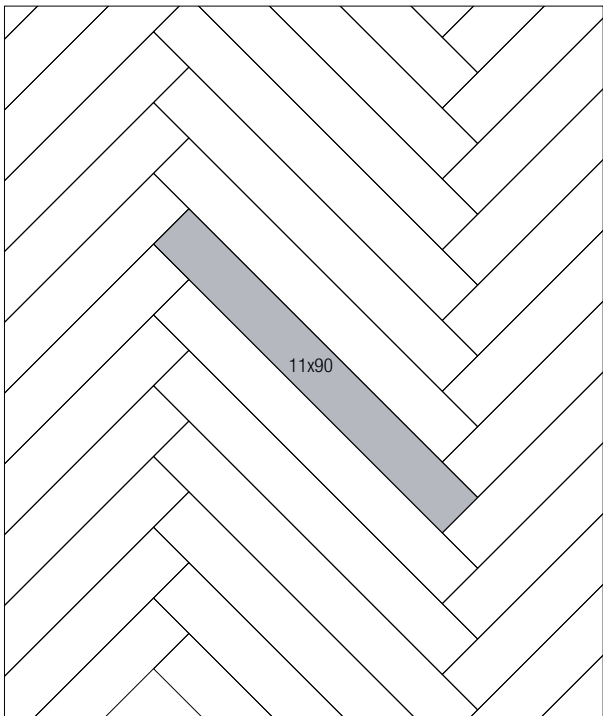


1F-1 - 11x90 - 100%

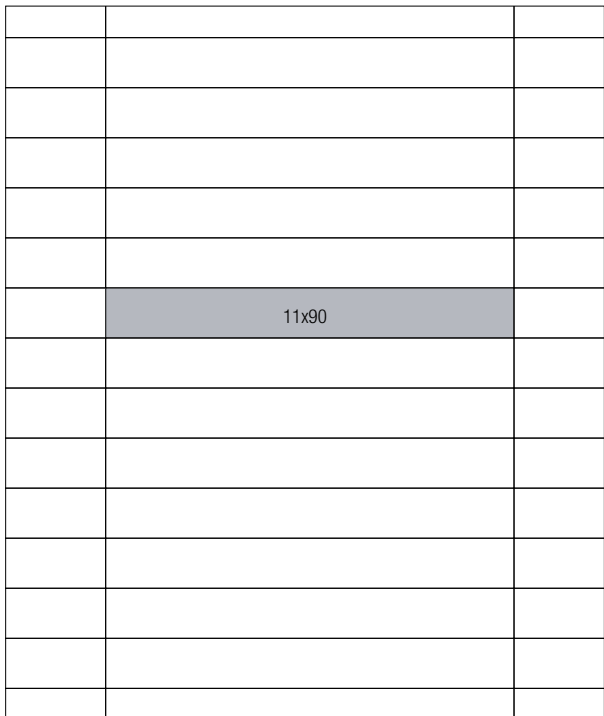


1F-2 - 11x90 - 100%

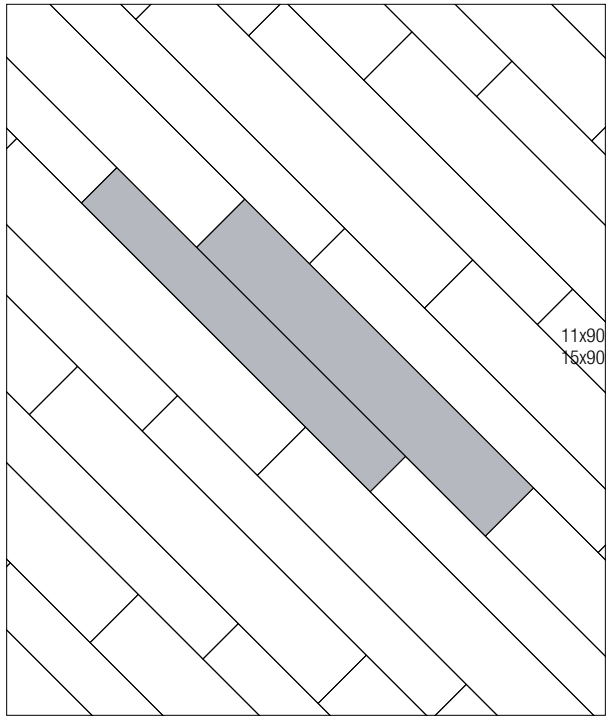


2F-3 - 15x90 - 57,70%
11x90 - 42,30%

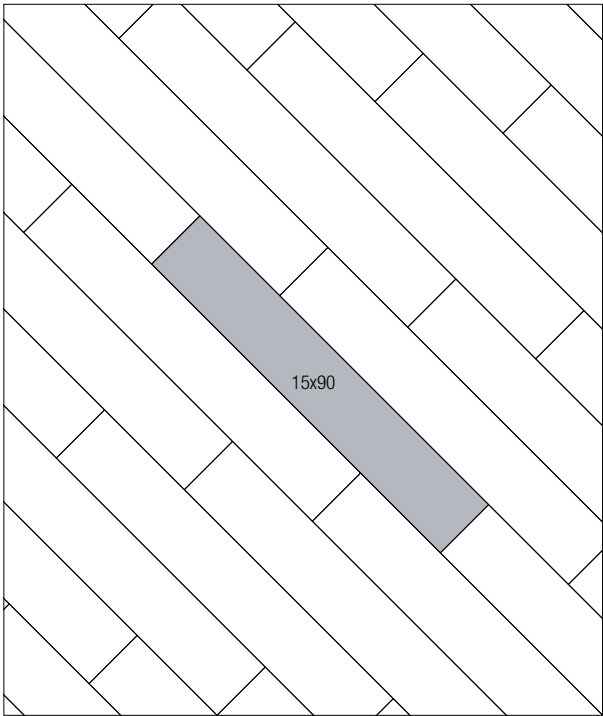

1F-3 - 15x90 - 100%

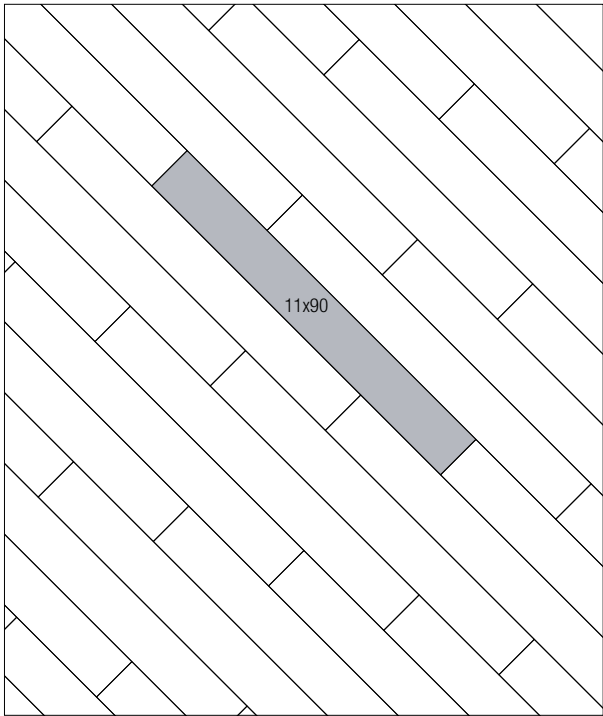

1F-4 - 11x90 - 100%

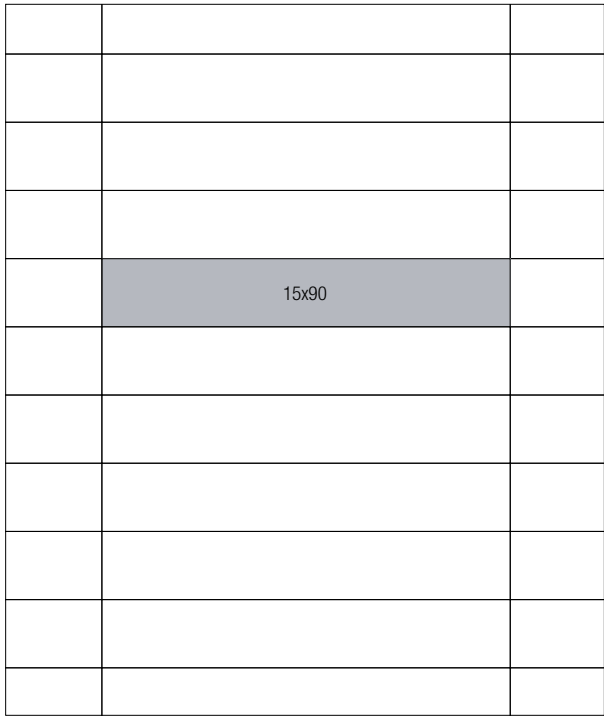

1F-5 - 15x90 - 100%

44

OPEN

Technical Data - Característica Técnicas

Technical Data Características Técnicas Données Techniques Características Técnicas		Directives Normas Normes Normas	OPEN	
	Size - Lenght, width and thickness Dimensão - Comprimento, largura e espessura Dimension - Longueur, largeur et épaisseur Dimensión - Longitud, anchura y espesor	ISO 10545-2	9,5mm	
	Stain resistance Resistência a manchas Résistance aux taches Resistencia a las manchas	Thickness Espessura Épaisseur Espesor	ISO 10545-14	4 - 5 Simple removal Remoção simples Enlèvement simple Eliminacion sencilla
	Bending strength Resistência à flexão Résistance à la flexion Resistencia a la flexión		ISO 10545-4	50N/mm²
	Linear thermal expansion coefficient Coeficiente de dilatação térmica linear Coefficient dilation thermique linéaire Coeficiente de dilatación térmica lineal		ISO 10545-8	(Max.) 6,5*10 ⁻⁶ /°C (máx.) (Max.) (Máx.)
	Chemical resistance Resistência química Résistance chimique Resistencia química	Cahier CSTB 3659 Attachment 8 Anexo 8 Annexe 8 Anexo 8	3	No alteration Sem alteração Aucune modification Sin modificacion
	Frost resistance Resistência ao gelo Résistance au gel Resistencia al hielo		ISO 10545-12	Sim Yes Oui Sí
	Water absorption Absorção de água Absorption d'eau Absorción de agua		ISO 10545-3	± 0,03%
	Deep abrasion resistance Resistência à abrasão profunda Résistance a l'abrasion profonde Resistencia a la abrasión profunda		ISO 10545-6	123 mm³
	Slipping resistance Resistência ao escorregamento Résistance à la glissance Resistencia al resbalar	DIN 51130	Natural Rectified R9 Open Deck R10	
		DIN 51097	Natural Rectified A Open Deck A	

package
embalagem
emballage
embalaje

	box / caixa / boîte / caja			europallet / europalette		
size formato formato formato	sqm m²	pieces peças pièces piezas	kg	sqm m²	boxes caixas boîtes cajas	kg
11x90	1,03	11	24,2	61,80	60	1482
15x90	1,02	8	24,0	61,20	60	1470
Open White Shadows	-	4	8,2	-	-	-
Open Lines White / Grey	-	4	8,2	-	-	-
Open Globes White / Grey	-	4	7,6	-	-	-
Open Light / Dark Chess	-	4	3,3	-	-	-

Gres Panaria Portugal S.A.
Chousa Nova - 3830-133 Ílhavo - PORTUGAL
Tel.: +351 234 329 700
Fax: +351 234 302 090
e-mail: margres@margres.com
www.margres.com
www.MARGRESLIVE.COM



projecto gráfico: ARCHILINEA
coordenação: MARKETING MARGRÉS
fotografia: MODO FOTOGRAFIA
impressão: LITOGRAPHIC GROUP

MARGRES
CERAMIC STYLE

